

4K WDR Ultra-HD Vari-focal Bullet Network Camera

IPC268ER9-DZ



Key Features

Optics

- Day/night functionality
- Smart IR, up to 100m (328ft) IR distance
- Up to 120dB Optical WDR (Wide Dynamic Range)
- 2D/3D DNR (Digital Noise Reduction)
- Optical glass window with higher light transmittance

Compression

- Ultra 265, H.265, H.264, MJPEG
- Triple streams
- ROI (Region of Interest)
- 9:16 corridor mode
- Customized OSD

Network

- ONVIF Conformance

Structure


- Wide temperature range: -40°C ~ 60°C (-40°F ~ 140°F)
- Wide voltage range of $\pm 25\%$
- IP67
- 3-Axis

Specifications

| | | | | | |
|-------------------------|--|------------|----------------|---------------|-------------------|
| | IPC268ER9-DZ | | | | |
| Camera | | | | | |
| Sensor | 1/2.5", 8.0 megapixel, progressive scan, CMOS | | | | |
| Lens | 2.8 ~ 12mm@F1.6, P-Iris, AF automatic focusing and motorized zoom lens | | | | |
| DORI Distance | Lens (mm) | Detect (m) | Observe (m) | Recognize (m) | Identify (m) |
| | 2.8 | 77.8 | 31.1 | 15.6 | 7.8 |
| | 12 | 333.3 | 133.3 | 66.7 | 33.3 |
| Angle of View (H) | 118.5° ~ 30.4° | | | | |
| Angle of View (V) | 64.0° ~ 16.6° | | | | |
| Angle of View (O) | 154.1° ~ 37.4° | | | | |
| Adjustment angle | Pan: 0° ~ 360° | | Tilt: 0° ~ 90° | | Rotate: 0° ~ 360° |
| Shutter | Auto/Manual, 1 ~ 1/100000s | | | | |
| Minimum Illumination | Colour: 0.02Lux (F1.6, AGC ON) 0Lux with IR | | | | |
| Day/Night | IR-cut filter with auto switch (ICR) | | | | |
| Digital noise reduction | 2D/3D DNR | | | | |
| S/N | >55dB | | | | |
| IR Range | Smart-IR, up to 100m (328ft) IR range | | | | |
| Defog | Digital Defog | | | | |
| WDR | 120dB | | | | |
| Video | | | | | |
| Video Compression | Ultra 265, H.265, H.264, MJPEG | | | | |
| Frame Rate | Main Stream: 8MP (3840*2160), Max 30fps; 2MP (1920*1080), Max 30fps; Sub Stream: 2MP (1920*1080), Max 30fps; Third Stream: D1 (720*576), Max 30fps | | | | |
| 9:16 Corridor Mode | Supported | | | | |
| HLC | Supported | | | | |
| BLC | Supported | | | | |
| OSD | Up to 8 OSDs | | | | |
| Privacy Mask | Up to 8 areas | | | | |
| ROI | Up to 8 areas | | | | |
| Motion Detection | Up to 4 areas | | | | |
| Smart | | | | | |
| General Function | Watermark, IP Address Filtering, Tampering Alarm, Alarm input, Alarm output, Access Policy, ARP Protection, RTSP Authentication, User Authentication | | | | |
| Audio | | | | | |
| Audio Compression | G.711 | | | | |
| Two-way audio | Supported | | | | |
| Suppression | Supported | | | | |
| Sampling Rate | 8KHZ | | | | |
| Storage | | | | | |
| Edge Storage | Micro SD, Up to 256GB | | | | |

| | |
|------------------------|--|
| Network Storage | ANR |
| Network | |
| Protocols | IPv4, IGMP, ICMP, ARP, TCP, UDP, DHCP, PPPoE, RTP, RTSP, RTCP, DNS, DDNS, NTP, FTP, UPnP, HTTP, HTTPS, SMTP, 802.1x, SNMP, QoS |
| Compatible Integration | ONVIF (Profile S, Profile G, Profile T), API |
| Interface | |
| Audio I/O | Audio cable |
| | 1 Input: impedance 35kΩ; amplitude 2V [p-p] |
| | 1 Output: impedance 600Ω; amplitude 2V [p-p] |
| Alarm I/O | 2/1 |
| Serial Port | 1 RS485 |
| Network | 1 RJ45, 10M/100M Base-TX Ethernet |
| Video Output | 1 BNC, impedance 75Ω; amplitude 1V [p-p] |
| General | |
| Power | DC 12V±25%, AC 24V±25%, PoE (IEEE 802.3at) |
| | Power consumption: Max 13.7W |
| Dimensions (L × W × H) | 305.5 × 104.1 × 97.3mm (12.0" × 4.1" × 3.8") |
| Weight | 1.65kg (3.6lb) |
| Working Environment | -40°C ~ 60°C (-40°F ~ 140°F), Humidity: ≤95% RH (non-condensing) |
| Ingress Protection | IP67 |
| Reset Button | Supported |

Dimensions

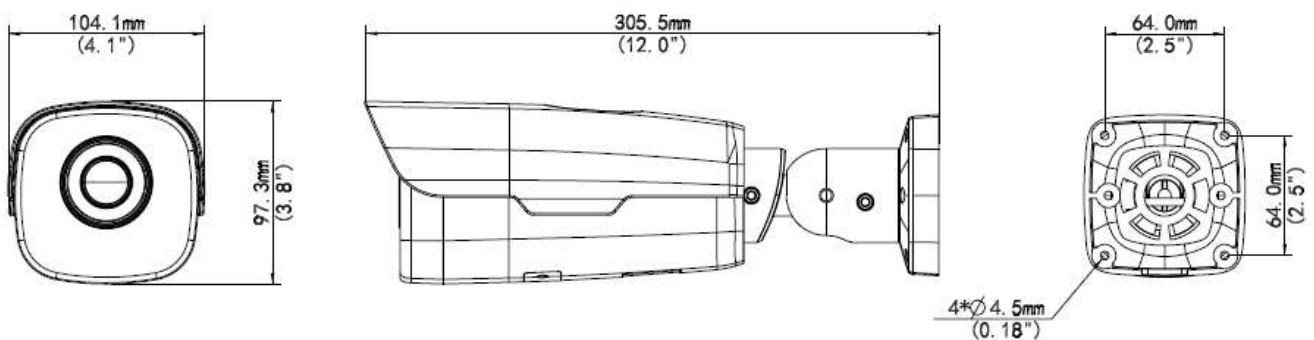

Building No.10, Wanlun Science Park, Jiangling Road 88, Binjiang District, Hangzhou, Zhejiang, China (310051)

Email: overseasbusiness@uniview.com; globalsupport@uniview.com

<http://www.uniview.com>

©2019 Zhejiang Uniview Technologies Co., Ltd. All rights reserved.

*Product specifications and availability are subject to change without notice.



IPC268ER9-DZ

MSRP: \$1209

Your Price: Special Order Only, Please Call for Pricing (allow additional 2 weeks for shipping)

Shipping calculated at checkout.

4K WDR Ultra-HD Vari-focal Bullet Network Camera

- 1/2.5" 8MP, progressive scan CMOS
- Up to 3840×2160 resolution, 30fps
- 2.8 ~ 12mm Optical Zoom & Auto Focus
- Smart IR, up to 100m IR distance
- 120dB True WDR
- Ultra 265, H.265, ONVIF
- AC24V, DC12V,PoE.Wide voltage range of ±25%
- IP67



YOU MAY ALSO LIKE

Quick links

[Search](#)

[Our Locations](#)

[Contact Us](#)

[Live Demo](#)

IPC3614SR3-DPF28(36)(60)

4MP Network IR Fixed Dome Camera



Contact

Call : 347-554-8188

Text : 347-688-5552

[WhatsApp : 347-554-8188](#)



Newsletter

IPC2328SBR5-DPZ

8MP VF Network IR Bullet Camera

[SUBSCRIBE](#)

© 2021, SecuritySystemDepot Powered by Shopify

© 2021, SecuritySystemDepot Powered by Shopify



IPC3614LR3-PF28(40)-D

4MP Fixed Dome Network Camera



TR-UF45-E-IN

Fixed Dome Plate Mount